



# Multiprocessor

IMP Series




A TOOL FOR EVERY JOB





# Application areas

  
Demolition & renovation


  
Recycling

		IMP		
Demolition & renovation	Light Demolition	<ul style="list-style-type: none"> <li>Demolition of masonry structures</li> <li>Brickwork</li> <li>Natural stone</li> <li>Renovation of interiors</li> <li>Autoclaved aerated concrete</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Demolition of non-reinforced concrete structures	<ul style="list-style-type: none"> <li>Primary demolition of lightweight and standard concrete</li> <li>Primary demolition of heavyweight concrete</li> <li>Wall elements</li> <li>Secondary demolition</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Composite steel & concrete structure demolition	<ul style="list-style-type: none"> <li>Primary Demolition of Lightweight and Standard reinforced concrete</li> <li>Primary demolition of heavyweight steel - reinforced concrete</li> <li>Secondary Demolition floors, slabs and beams</li> <li>Separating rebars from pillars and struts</li> <li>Fiber-reinforced concrete</li> <li>Cutting rebars and steel reinforcements</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Demolition of metallic buildings and structures	<ul style="list-style-type: none"> <li>Demolition of refineries</li> <li>Cutting of Metal and steel structures</li> <li>Cutting steel girders/beams</li> <li>Cutting reinforcements</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Sorting and Loading	<ul style="list-style-type: none"> <li>Sorting</li> <li>Loading</li> <li>Waste handling</li> <li>Site clean-up</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Pavement demolition	<ul style="list-style-type: none"> <li>Asphalt</li> <li>Concrete</li> <li>Composite surfaces</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	
	Recycling	Processing	<ul style="list-style-type: none"> <li>Scrap material processing</li> <li>Cutting tyres</li> <li>Processing rail cars</li> <li>Processing cars, trucks and general automotive</li> <li>Cutting tanks</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
		Handling and sorting	<ul style="list-style-type: none"> <li>Scrap material handling</li> <li>Scrap material sorting</li> <li>Urban waste</li> <li>Industrial waste</li> <li>Wood and tyres</li> </ul>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
		Downsizing and sorting	<ul style="list-style-type: none"> <li>Material downsizing and sorting in recycling quarries</li> </ul>	<input type="checkbox"/>



# Multiprocessor Indeco IMP


Designed to ensure maximum versatility, the Indeco IMP multiprocessor is the perfect solution for specialist or non-specialist firms who need a tool that can handle a variety of different jobsite situations in the demolition and recycling field. Different jawsets enable it to be used in the various crusher, pulverizer, shear and Combi Cutter configurations on the same carrier. Made with the latest technologically advanced materials, such as special extra-strength HARDOX® alloy steel, which eliminates any flexing of the body, the Indeco IMP multiprocessor is designed to withstand high levels of pressure, wear and abrasion, and prolonged use regardless of jobsite conditions. Unique features such as the special design of the jaws, the tried and tested rotation mechanism (found on all Indeco rotating products) and interchangeable teeth on the mobile jaw in crusher and pulverizer configuration, help this product perform very well in all applications. In “shear” configuration, some of the unique features of the Indeco ISS shears have been incorporated, such as the cutting geometries, the blade configurations, and the exclusive piercing system. The new Combi Cutter jaws are particularly well-suited for demolishing reinforced concrete structures, as the tip is equipped with two field-replaceable toothed plates, while extra-long blades in the rear make cutting the steel rods inside reinforced concrete even easier.

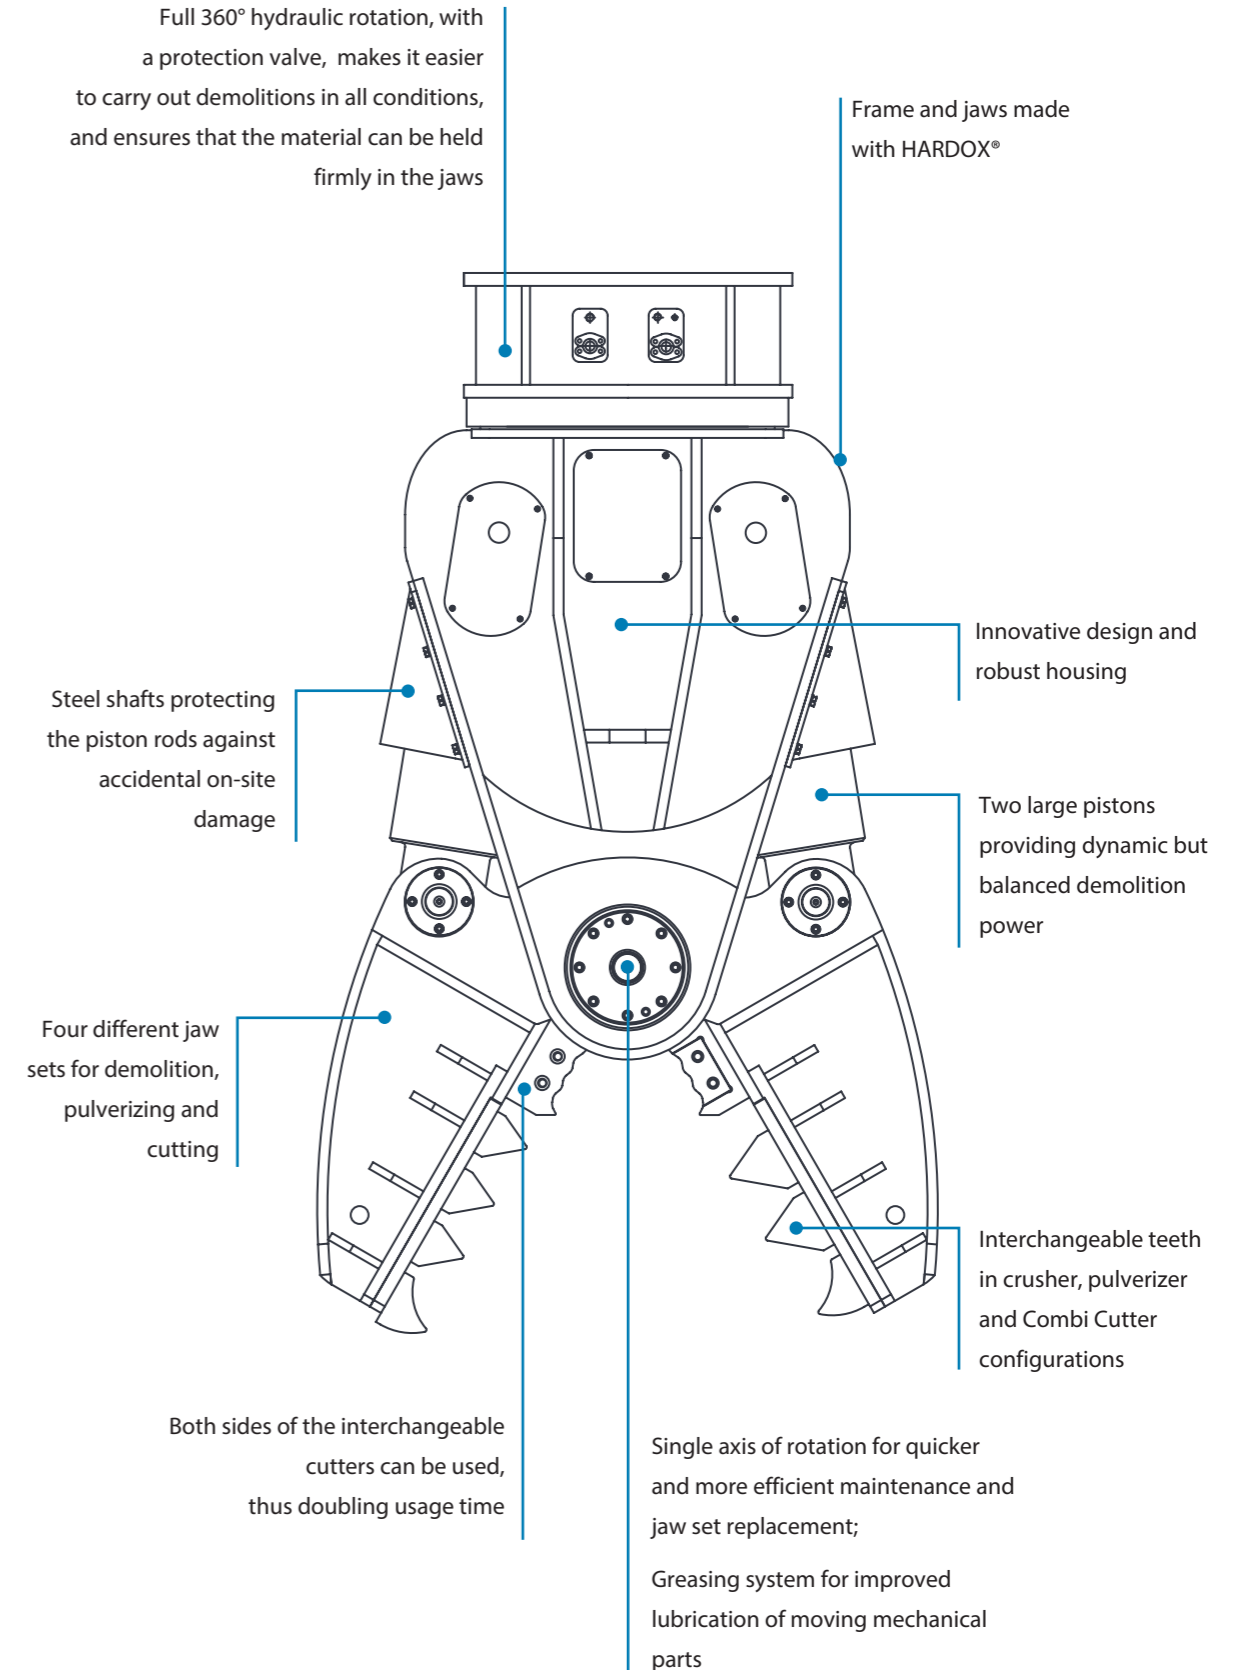



Technical Data	IMP 15	IMP 20	IMP 25
Type of carrier	4 5	4 5	4 5
Excavator weight*	12 ÷ 24 tons	17 ÷ 36 tons	20 ÷ 45 tons
Width	425 mm	475 mm	495 mm
Oil delivery	150 ÷ 250 l/min	180 ÷ 250 l/min	200 ÷ 300 l/min
Maximum pressure at cylinders	350 bars	350 bars	350 bars
Closure time (no-load)	2 s	2,5 s	3 s
Opening time (no-load)	1 s	1,2 s	1,5 s
Hydraulic connections for cylinders	3/4"	3/4"	3/4"
Maximum rotation flow	20 l/min	25 l/min	25 l/min
Maximum rotation pressure	110 bars	110 bars	110 bars
Hydraulic connections for rotation	1/2"	1/2"	1/2"
Mounting bracket compatibility	HP 2000 - HP 2500	HP 3000 ÷ HP 4000	HP 3000 ÷ HP 4000

\*The operating weight of the equipment includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.

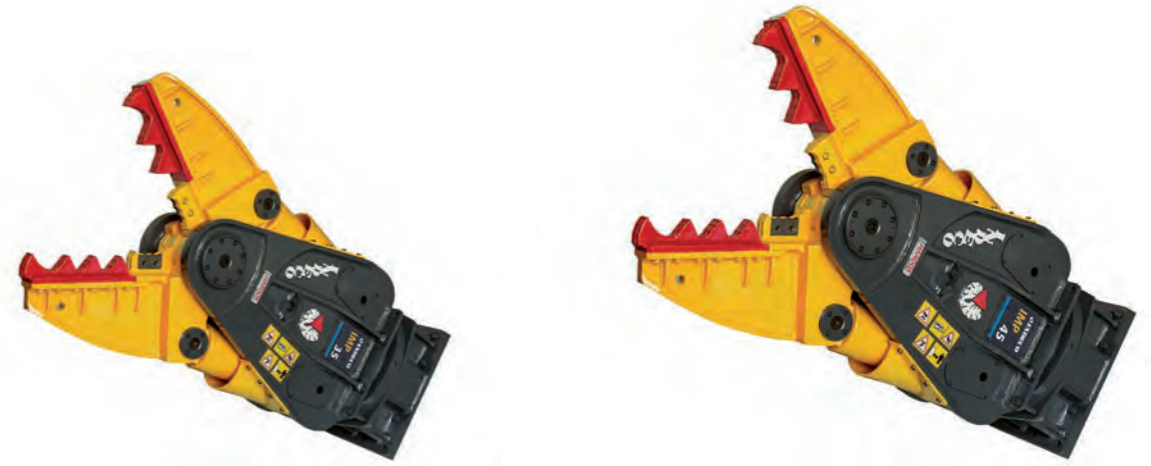

Technical Data	IMP 35	IMP 45
Type of carrier	5	5
Excavator weight*	28 ÷ 55 tons	38 ÷ 65 tons
Width	590 mm	640 mm
Oil delivery	220 ÷ 320 l/min	270 ÷ 370 l/min
Maximum pressure at cylinders	350 bars	350 bars
Closure time (no-load)	4 s	4 s
Opening time (no-load)	2 s	2 s
Hydraulic connections for cylinders	1" 1/4	1" 1/4
Maximum rotation flow	30 l/min	30 l/min
Maximum rotation pressure	110 bars	110 bars
Hydraulic connections for rotation	1/2"	1/2"
Mounting bracket compatibility	HP 5000	HP 7000 - HP 9000


N.B. All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

#### Carrier key



#### compatibility

Suggested uses on machines with an overall weight (in tons):

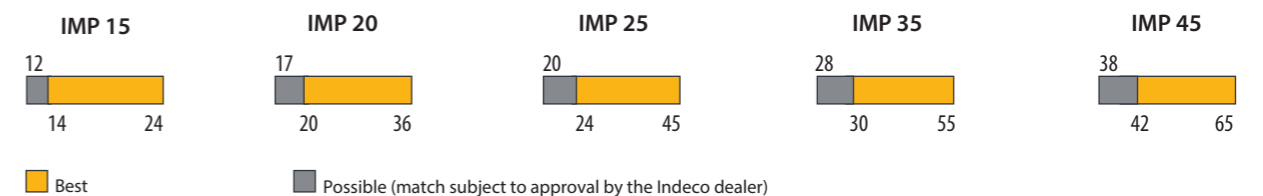



## Jaw technical data

Jaws for IMP 15	Crusher	Pulverizer	Shear	Combi Cutter
Operating weight*	1500 Kg	1500 Kg	1600 Kg	1600 Kg
Height	1900 mm	1860 mm	1950 mm	1900 mm
Maximum opening	815 mm	720 mm	450 mm	860 mm
Jaw depth	595 mm	575 mm	500 mm	670 mm
Cutter blade length	120 mm	120 mm	490 mm	230 mm
Max clamping force at tip	50 tons	50 tons	55 tons	50 tons
Maximum clamping force at shears	230 tons	225 tons	220 tons	230 tons

Jaws for IMP 20	Crusher	Pulverizer	Shear	Combi Cutter
Operating weight*	2080 Kg	2080 Kg	2200 Kg	2200 Kg
Height	2120 mm	2070 mm	2170 mm	2150 mm
Maximum opening	910 mm	800 mm	500 mm	960 mm
Jaw depth	660 mm	640 mm	550 mm	750 mm
Cutter blade length	120 mm	120 mm	540 mm	230 mm
Max clamping force at tip	60 tons	65 tons	70 tons	60 tons
Maximum clamping force at shears	270 tons	280 tons	270 tons	270 tons


Jaws for IMP 25	Crusher	Pulverizer	Shear	Combi Cutter
Operating weight*	2400 Kg	2450 Kg	2600 Kg	2600 Kg
Height	2290 mm	2280 mm	2340 mm	2300 mm
Maximum opening	1050 mm	850 mm	550 mm	1100 mm
Jaw depth	760 mm	700 mm	620 mm	860 mm
Cutter blade length	180 mm	180 mm	600 mm	345 mm
Max clamping force at tip	95 tons	90 tons	90 tons	95 tons
Maximum clamping force at shears	340 tons	340 tons	330 tons	340 tons

Jaws for IMP 35	Crusher	Pulverizer	Shear	Combi Cutter
Operating weight*	3500 Kg	3600 Kg	3700 Kg	3700 Kg
Height	2450 mm	2500 mm	2515 mm	2450 mm
Maximum opening	1150 mm	1050 mm	640 mm	1200 mm
Jaw depth	860 mm	870 mm	710 mm	970 mm
Cutter blade length	180 mm	180 mm	660 mm	460 mm
Max clamping force at tip	110 tons	110 tons	120 tons	110 tons
Maximum clamping force at shears	390 tons	430 tons	420 tons	390 tons


Jaws for IMP 45	Crusher	Pulverizer	Shear	Combi Cutter
Operating weight*	4500 Kg	4700 Kg	4900 Kg	4900 Kg
Height	2660 mm	2730 mm	2760 mm	2700 mm
Maximum opening	1250 mm	1150 mm	700 mm	1300 mm
Jaw depth	930 mm	950 mm	780 mm	1050 mm
Cutter blade length	180 mm	180 mm	720 mm	460 mm
Max clamping force at tip	130 tons	130 tons	140 tons	130 tons
Maximum clamping force at shears	460 tons	480 tons	460 tons	460 tons

\*The operating weight of the equipment includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.


### IMP - crusher configuration

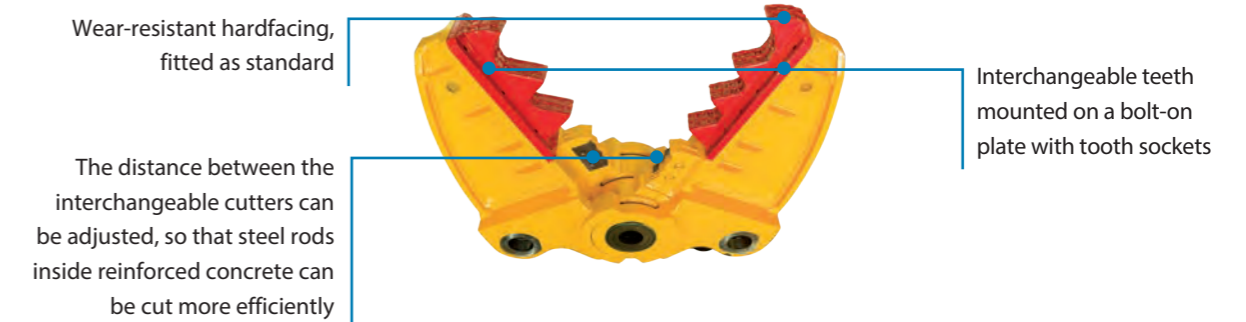


### IMP - pulverizer configuration

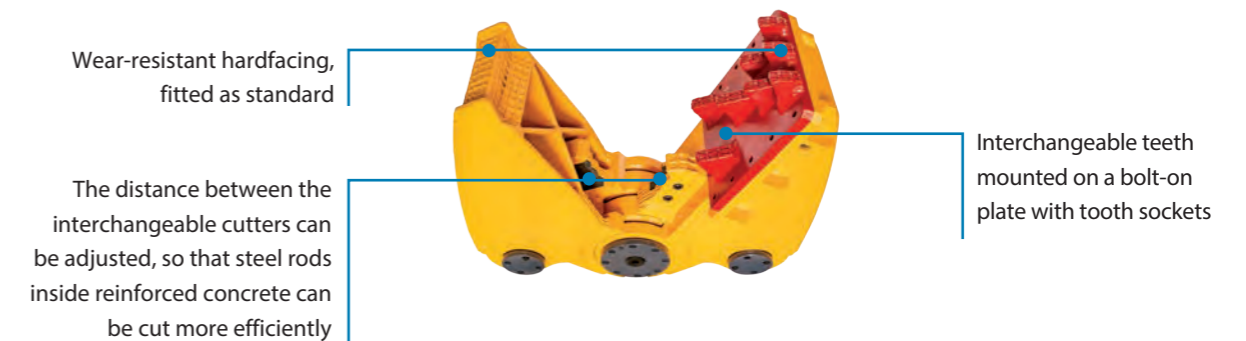

### IMP - shear configuration

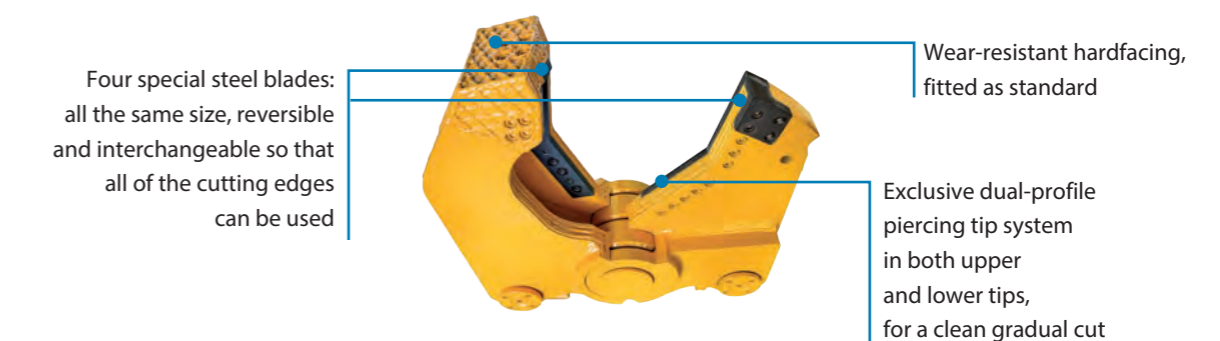

### IMP - Combi Cutter configuration

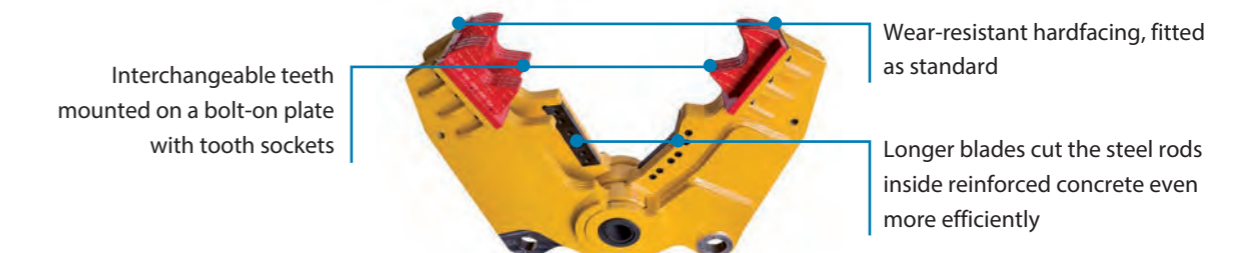

















# Appetite guide

Profiles and maximum dimensions that can be cut with the IMP in "Shear" configuration








## Shear for IMP 15

Type	UNI	Type	UNI
	UPN 100		HEA 100
	90x90x8		6 mm
	88,9x7,1		40 mm
	IPE 120		








## Shear for IMP 20

Type	UNI	Type	UNI
	UPN 120		HEA 100
	110x110x10		8 mm
	101,6x6,3		45 mm
	IPE 140		








## Shear for IMP 25

Type	UNI	Type	UNI
	UPN 160		HEA 120
	120x120x12		10 mm
	114,3x8		50 mm
	IPE 180		

## Shear for IMP 35

Type	UNI	Type	UNI
	UPN 180		HEA 140
	130x130x12		13 mm
	121x10		55 mm
	IPE 200		

## Shear for IMP 45

Type	UNI	Type	UNI
	UPN 200		HEA 160
	150x150x12		16 mm
	139,7x8		60 mm
	IPE 220		



## The full range of other Indeco products

Products	Weight
IFP 8 X	750 Kg
IFP 13 X	1300 Kg
IFP 19 X	1800 Kg
IFP 28 X	2800 Kg
IFP 35 X	3450 Kg
IFP 45 X	4550 Kg
IRP 5 X	570 Kg
IRP 11 X	1150 Kg
IRP 18 X	1700 Kg
IRP 23 X	2300 Kg
IRP 29 X	2950 Kg
IRP 36 X	3600 Kg
IRP 45 X	4500 Kg
IMP* 15	1500 Kg
IMP* 20	2080 Kg
IMP* 25	2400 Kg
IMP* 35	3500 Kg
IMP* 45	4500 Kg

Products	Weight
IHC 50	200 Kg
IHC 70	445 Kg
IHC 75	485 Kg
IHC 150	970 Kg
IHC 250	1280 Kg
IHC R 50	425 Kg
IHC R 70	630 Kg
IHC R 75	670 Kg
IHC R 150	1185 Kg
IHC R 250	1520 Kg
IMG S** 400	380 Kg
IMG S** 600	570 Kg
IMG S** 1200	1140 Kg
IMG S** 1700	1610 Kg
IMG S** 2300	2180 Kg
IMG S** 2800	2650 Kg
ISS*** 5/7	570 Kg
ISS*** 10/20	2400 Kg

Products	Weight
ISS*** 20/30	3650 Kg
ISS*** 25/40	4800 Kg
ISS*** 30/50	6100 Kg
ISS*** 35/60	7600 Kg
ISS*** 45/90	10400 Kg
IMH 5	540 Kg
IMH 6	555 Kg
IMH 8	600 Kg
IMH 10	736 Kg
IMH 12	1050 Kg
IMH 15	1500 Kg
IMH 19	1550 Kg
IMH 28	2095 Kg
IMH 3.5 SS	1150 Kg
IMH SG16	845 Kg
IMH SG20	845 Kg

\*Crusher configuration - \*\*Sorter configuration - \*\*\*Third-member configuration

Indeco Ind. SpA  
 viale Lindemann, 10 z.i. - 70132 Bari - Italy  
 tel. +39 080 531 33 70 - fax +39 080 537 79 76  
 info@indec.it - www.indec.it/en

